1.5m high vertical bar type - Type 4d

Description: 1500 mm high barrier top fixed to concrete block wall. Plastic cap Application: Concrete block wall.

20 50 x 50 x 2.0 C350/C450 SHS 1570c/c max. Panel height 1500mm Moduline 19mm square vertical bar panel between posts Position the post on the centreline of the wall Base Fixing Detail Γ 130 x 108 x 10 Base plate ~~~~ × * 110 min. Non shrink grout

Ж

Ж

Ж

190 block wall

(by others)

Ж

DRAWING NOTES

Design Scope and Compliance: This specification covers the design of the barrier members and base fixing only, and does not cover the design of the supporting structure. The contractor or building designer must ensure that the supporting structure can support the barrier loads. The barrier design complies with the New Zealand Building Code: Section B1/VM1 (structure) - AS/NZS 1170.1 barrier cat. A, B, C3 & E - NZS3604:2011 extra high wind zone (55m/s). Section F4/AS1 (safety from falling). Section F9/AS1 (restricting access to residential pools) Notes: Threaded rod & washers shall be 316 stainless steel. Provide neoprene washers or DPC between washers and baseplate. All measurements in mm unless stated otherwise ... 190 190 block wall 5mm f.w. 130 x 108 x 10 Plate 90 50 x 50 x 2 (C350/C450) SHS post to be centred on the wall 68 4M10 threaded rod grouted 110 min into wall with Ramset Epcon C6 series epoxy mortar **Base Fixing Detail** FGL 'C' grade solid filled

30/8/2017			
14/12/2017			
20/09/2019			
12/01/2022			
04/09/2024			


Revision D

Section

60 max.

////

Over 1000

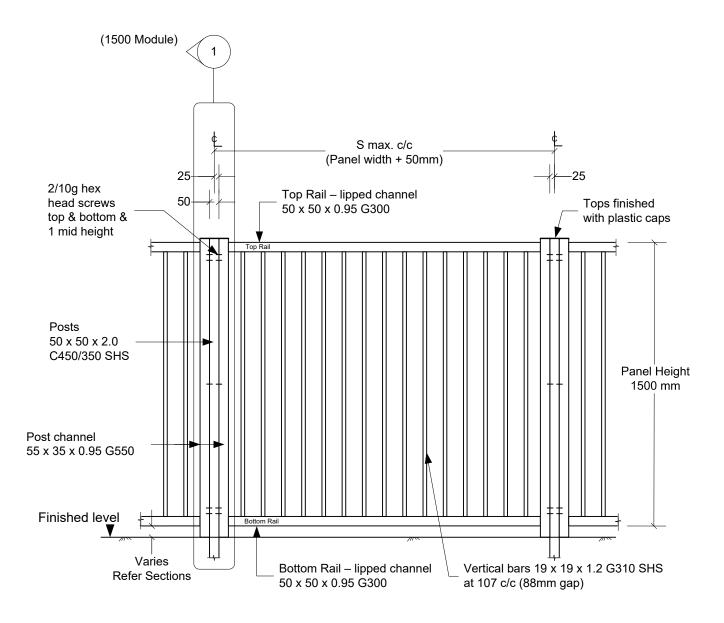

<u>Notes:</u> All measurements in mm unless stated otherwise.

1.5m high vertical bar type - Type 4


(See specification sheet for detail) (Scale 1:20)

- Revision	30/8/2017 Date
Α	19/01/2018
В	20/09/2019
С	04/09/2024

Revision C

1.5m high solid panel type - Type 4d

Description: 1500 mm high barrier top fixed to concrete block wall. Application: Concrete block wall.

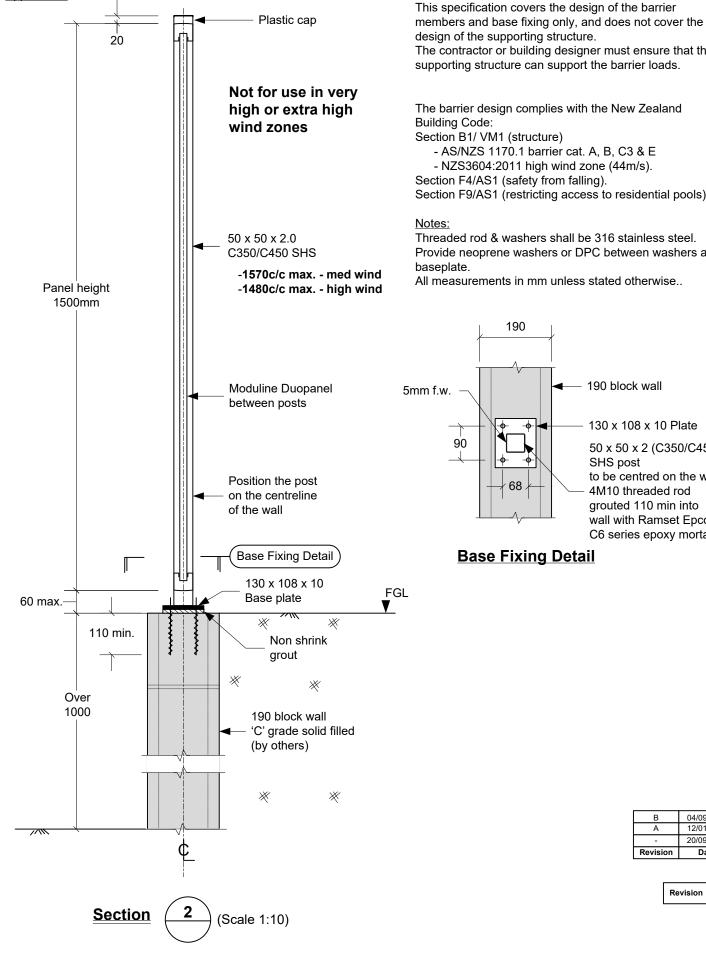

DRAWING NOTES


Design Scope and Compliance:

The contractor or building designer must ensure that the supporting structure can support the barrier loads. The barrier design complies with the New Zealand - AS/NZS 1170.1 barrier cat. A, B, C3 & E - NZS3604:2011 high wind zone (44m/s). Section F9/AS1 (restricting access to residential pools) Threaded rod & washers shall be 316 stainless steel. Provide neoprene washers or DPC between washers and All measurements in mm unless stated otherwise ... 190 block wall 130 x 108 x 10 Plate 50 x 50 x 2 (C350/C450) SHS post to be centred on the wall 4M10 threaded rod grouted 110 min into wall with Ramset Epcon C6 series epoxy mortar

Base Fixing Detail

В	B 04/09/2024			
A	12/01/2022			
-	20/09/2019			
Revision	Date			

Revision в

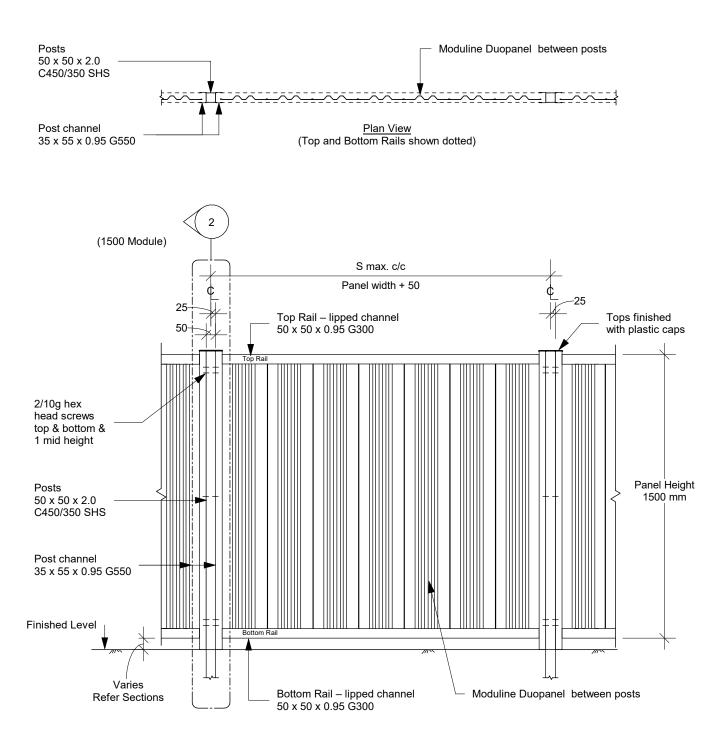

Notes:

All measurements in mm unless stated otherwise.

<u>1.5m high solid panel type - Type 4</u> (See specification sheet for detail)

(Scale 1:20)

A	04/09/2024
-	20/09/2019
Revision	Date

Revision А



PRODUCER STATEMENT - PS1 - DESIGN

	ENG REF: 7327 Type 4d					
ISSUED BY	Anthony Marino (for Marino			.td)		
TO: Metal Ro	ollforming Ltd	(Design Fi	rm)			
		(Owner/Deve	eloper)			
TO BE SUPPLIE	D TO: Various	(Onnon Bore				
		Building Consei				
IN RESPECT OF	: Moduline SafeBarrier Pro 1	-				
(Description of Building Work)						
AT: Non-	Specific,	(Address	\$)			
LOT:	DP:	,	SO:			
We have been engaged by the owner/developer referred to above to provide specific structural design services in respect of the requirements of Clause(s) B1, F4, F9 of the Building Code for						
	Part only (as specified in the atta building work.	ichment to th	is statement, ref: 73	327 Type 4d), of the proposed		
	ed out by us has been prepared i					
	ocuments issued by the Ministry			nployment		
	M1 (NZS3603, AS/NZS1170, N		AS1, F9/AS1			
	ution as per the attached sched					
	ilding work covered by this prod			he drawings titled		
Moduline SafeB	arrier Pro 1.5m high - Type 4d	an	d numbered 1,	2, 3, 4		
-	specification, and other docume	ents set out i	n the schedule attac	ched to this statement.		
(i) Site verific	Design Firm, and subject to: ation of the following design assign of supporting structure by other structure by structure	•				
	etary products meeting their perf		cification requireme	ents:		
I believe on reas specifications, ar provisions of the competency to d	sonable grounds that a) the bund other documents provided or Building Code and that b) the provided or o so. I also recommend the follo t required (observation by Council	ilding, if cons listed in the a ersons who h wing level of	structed in accordar attached schedule, have undertaken the	nce with the drawings, will comply with the relevant a design have the necessary		
I, Anthony Le		,		am <i>CPEng No 69890</i>		
		d hold the fo	llowing qualification			
I am a member of Engineering New Zeaaland and hold the following qualifications: BEHons., CPEng. The Design Firm issuing this statement holds a current policy of Professional Indemnity Insurance no less than						
\$200,000.	is a member of ACENZ:			,		
SIGNED BY	Anthony Marino (B.E.(hons)	. CPEna (Ci	vil and Structural).	CMEnaNZ. SESOC)		
-	Marino Consultants and Ass					
A	& manued	DATE	09/09/2024			
57 Stace Hopper (021) 518 171 (M	Drive, One Tree Point 0118 Iobile)					
anthony.marino@	Poutlook.co.nz (Email)					
Design Firm only. The	shall only be relied upon by the Building total maximum amount of damages pay relation to this building work, whether in d	able arising from	n this statement and all c	other statements provided to the Building		

This form is to accompany Form 2 of the Building (Forms) Regulations 2004 for the application of a Building Consent.